
Download Center

Alphacool Apex Grip SoftTube fitting 16/10mm G1/4 chrome

Alphacool article number: 14882

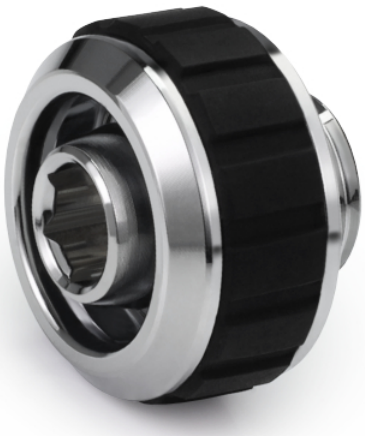

Quick Info

The Alphacool Apex Grip fittings are built around a modular system that allows for flexible and customized connection solutions in modern custom water-cooling setups. Combined with the refined and distinctive Apex design, high-quality workmanship, and user-friendly handling, the series is an ideal choice for demanding systems.

- Modular design
- Optimized surface for better grip
- High flow performance
- Premium Apex design

Scope of delivery

1x Apex Grip SoftTube fitting 16/10mm G1/4 chrome

We assume no responsibility for any typing errors. Alphacool International GmbH, Marienberger Strasse 1, 38122 Braunschweig Tel: (+49)0531 288 7400 Supportmail: info@alphacool.com

Technical Data

Height	18,50mm
Diameter	23,50mm
Material	Brass
Material Grip Surface	Silicone
Threads	G1/4
Thread Length	5mm
Softtube compatibility	16mm outer diameter (OD); 10mm inner diameter (ID)
Color	chrome

Download links

Product pictures	14882_Alphacool_Apex_Grip_SoftTube_fitting_16-10mm_G1-4_chrome_pics.zip
EU-DoC / CE / RoHS	Alphacool_EuDoc_CE_RoHS_14882.pdf

Packaging dimensions per unit

L x W x H	60 x 60 x 28 mm
Weight	34 g

Other data

Certificates	CE, FC, RoHS
EAN	4250197148825
Customs code	74198090980
Guarantee	5 years

Article text

The Alphacool Apex Grip fittings are built around a modular system that allows for flexible and customized connection solutions in modern custom water-cooling setups. Combined with the refined and distinctive Apex design, high-quality workmanship, and user-friendly handling, the series is an ideal choice for demanding systems.


A defining feature of the Apex Grip series is the integrated silicone surface on the outer grip area of each fitting. It provides enhanced grip when tightening by hand and makes installation noticeably easier, especially in confined spaces with limited access. This not only improves installation comfort, but also gives the user greater control during assembly.


Made from high-quality brass, the fittings offer excellent stability and long-term durability. A premium coating further enhances the series by helping to prevent paint chipping while emphasizing its elegant overall appearance.

Precision manufacturing ensures a reliable seal within the cooling loop while supporting high-flow performance throughout the system. At the same time, the modular design offers a high degree of versatility, making the fittings easy to adapt to a wide range of custom water-cooling configurations.

The Apex Grip fittings are the perfect choice for anyone who values comfortable handling and a refined appearance in their custom water-cooling system.

Figure (1)

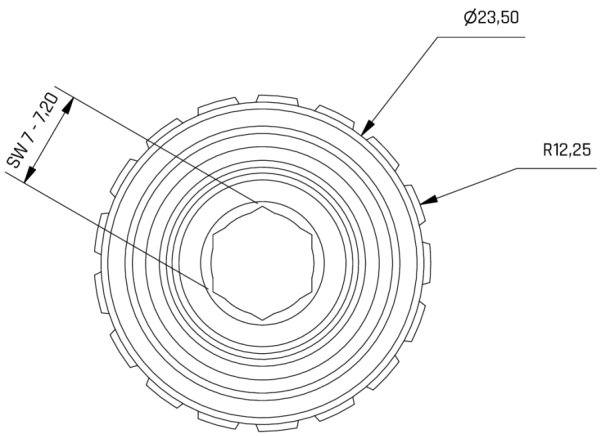

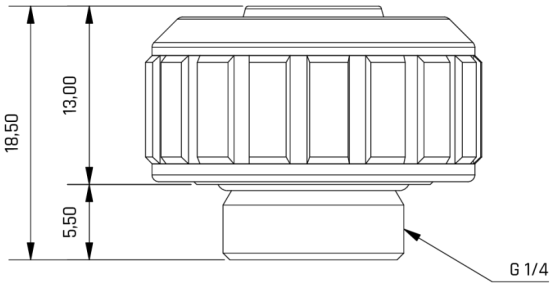


General tolerance: ± 0,25mm
Dimension in millimeter

Figure (2)

Mechanical properties:

Minimum temperature t min =	-20°C	Working pressure p =	0,0 - 2,0Bar
Working temperature t =	20°C	Maximum pressure p max =	4,0Bar
Maximum temperature t max =	60°C	Maximum torque of G thread M max =	G1/4 = 1,0Nm
		ISO 228-1 Parallel Whitworth pipe thread BSPP (GB)	

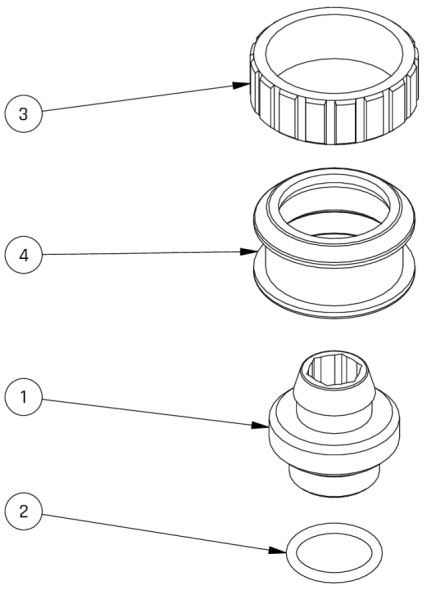

Spare parts list			
Number	Quantity	Description	Material
1	1	Mainpart	CuZn39Pb3
2	1	O-Ring 12,5 x 1,5	NBR Shore 70
3	1	Rubber Ring	NBR Shore 70
4	1	Top part	CuZn39Pb3